



APPLIED SCIENTIFIC  
INSTRUMENTATION

## MS-2000 Small XY Stage


The MS-2000 XY stage has been specifically designed to provide a high resolution, and highly repeatable, means of controlling the X and Y position of a microscope stage. All axes derive their precise control through the use of closed-loop DC servomotors employing high-resolution rotary encoders for positioning feedback. By using closed-loop control of the stage position, there is no chance that the stage will become lost, as can occur with open-loop micro-stepped stages after a number of moves and direction changes. The MS-2000 XY stage utilizes crossed-roller slides, a high-precision lead screw, and zero-backlash miniature geared DC servomotors for smooth and accurate motion. The microprocessor-controlled MS-2000 control unit provides for RS-232 and USB communication with a host computer.

### Features

- Closed-loop DC servo control of the XY-axes for precise positioning and repeatability
- Wide dynamic speed range with XY joystick control
- Backlit LCD display shows the coordinates
- Works with ASI's proven Z-axis drives
- Proven operation with many popular software packages
- "Zero" and "Home" button for simple stand-alone operations
- Microprocessor control with RS-232 serial and USB communications
- Compact ergonomic tabletop control unit size is 6"D x 9"W x 3"H (16½ x 23 x 9 cm)
- Suitable for smaller upright microscopes, stand-alone, OEM, and specialty applications

### Product Compatibility

- Leica – Aristoplan, Diaplan, DMLB, DMLS, DMLFS, Laborlux-D, Laborlux-S, Microplan, Orthoplan
- Nikon – AZ100, Eclipse 400, Eclipse 600, Eclipse 600FN, Labophot, Microphot FXA, Microphot SA, Optiphot, Optiphot 1, Optiphot 2, Optiphot UD, SMZ800, SMZ1000, SMZ1500
- Olympus – BH2, BX41, MVX Stereo, MX50, SZX12 Stereo, SZX16 Stereo
- Zeiss – Axiolab, Axiophot II, Axioskop FS, Axiostar, Standard 16, Universal

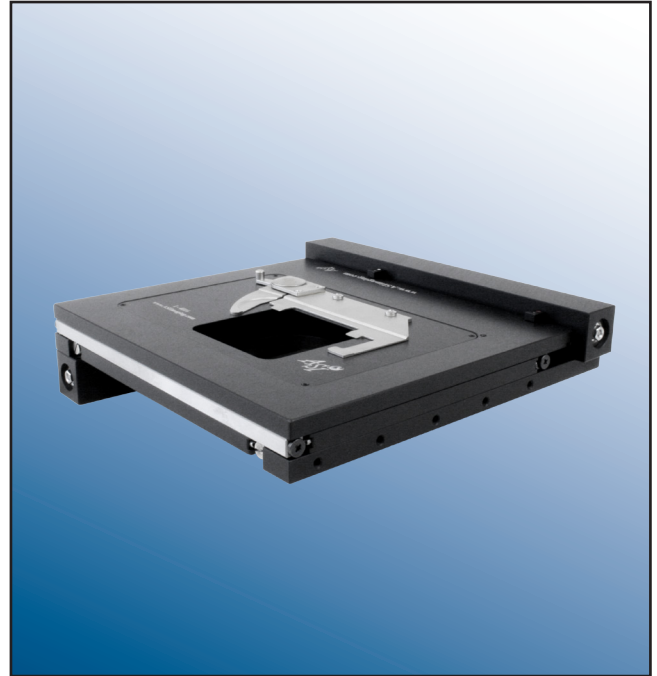

### Specifications for Standard Configuration

<b>XY axis range of travel</b>	100 mm x 100 mm
<b>XY axis resolution (rotary encoder step)</b>	0.022 µm
<b>XY axis RMS repeatability</b>	< 0.7 µm
<b>XY axis maximum velocity</b>	7 mm/sec
<b>Weight</b>	5 lbs (2.27 Kgs)
<b>Dimensions</b>	8"D x 9"W x 2.5"H (20½ x 23 x 6.5 cm)



APPLIED SCIENTIFIC  
INSTRUMENTATION

## MS-2000 Small XY Stage

### Lead Screw Options

Lead Screw Pitch Options	Rotary Encoder Resolution	Maximum Speed
12.70 mm (Super-coarse)	44 nm	14 mm/sec
6.35 mm (Standard)	22 nm	7 mm/sec
1.59 mm (Fine)	5.5 nm	1.75 mm/sec
0.635 mm (Extra-fine)	2.2 nm	0.7 mm/sec

### Linear Encoder Options

Axis	Resolution	Scale Accuracy
XY	10 nm	$\pm 3 \mu\text{m}$ per length of scale

*\*Standard Lead Screw Accuracy is 0.25  $\mu\text{m}$  per mm.*